



9900 Series Pipeline Regulator

Heavy Duty Heating and Cutting at Point of Use

Features


- Rear entry
 - *Excellent visibility*
- Large Seat Displacement
 - *High flow capacity*
- 2.5" (63mm) Convuluted Neoprene® Diaphragm
 - *Steady pressure control*

Material

- Forged Brass Body
- Neoprene® Seat
- Stainless Screen Filter

Specification

- 200 PSI Max Inlet
- Temperature Range -40° to 140°F (-40° to 60°C)

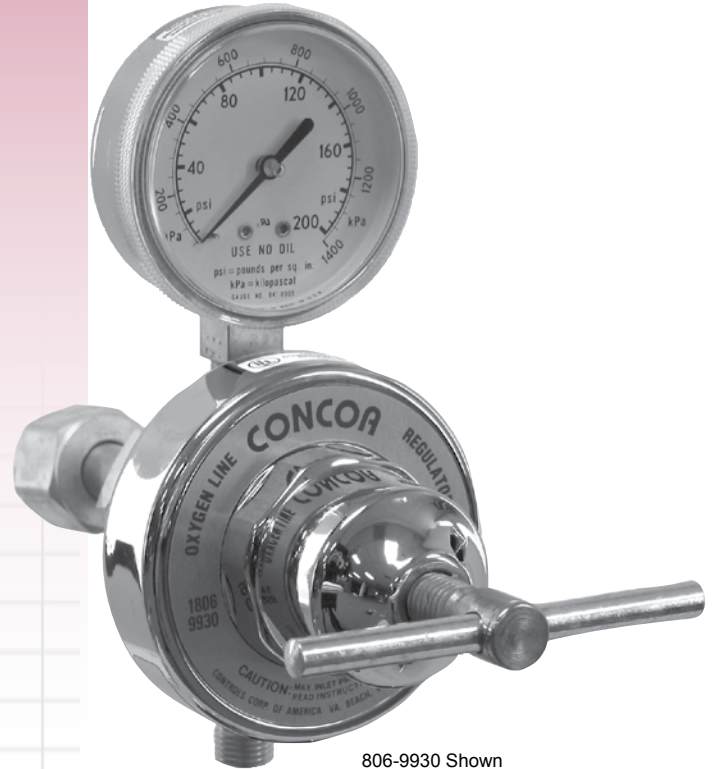

806-9930 Shown

Part Number	Gas Service	Delivery	Gauge	Max Flow	Inlet	Outlet	Station Valve
806-9930	Oxygen	0-150 PSIG	0-200 PSIG	1500 scfh	CGA 024	9/16"-18 'B' RH Ext.	Fits 801-0233*
806-9931	Oxygen	0-40 PSIG	0-60 PSIG	425 scfh	CGA 024	9/16"-18 'B' RH Ext.	Fits 801-0233*
806-9932	Fuel Gases (Acetylene*, Propane, Natural Gas)	0-15 PSIG	0-30 Redline PSIG	200 scfh	CGA 025	9/16"-18 'B' LH Ext.	Fits 801-0601*
806-9985	Inerts (Nitrogen, Helium, Argon)	0-150 PSIG	0-200 PSIG	1500 scfh	CGA 034	5/8"-18 'B' RH Ext.	Fits 801-0034*
806-9979	Fuel Gases (Not for Acetylene)	0-40 PSIG	0-60 PSIG	340 scfh	CGA 025	9/16"-18 'B' LH Ext.	Fits 801-0601*

Note: Acetylene should not be used over 15 PSIG

* Not included.