



# 2500 Series Specialized Use Regulator

## Helium Balloon Filling

### Features


- Rubber Tilt Valve
  - *Quick & Safe Fill*
- Over Pressure Relief Port
  - *Prevents regulator damage*
- Tie Hook Ready
  - *Prevents accidental discharge*

### Material

- Brass Bar Stock Body
- PTFE Seat
- 5-25 Micron Copper-Nickel or Nickel Plated Phosphor Bronze Inlet Filter

### Specification

- 3000 psi Max Inlet
- Temperature Range -40° to 140°F (-40° to 60°C)

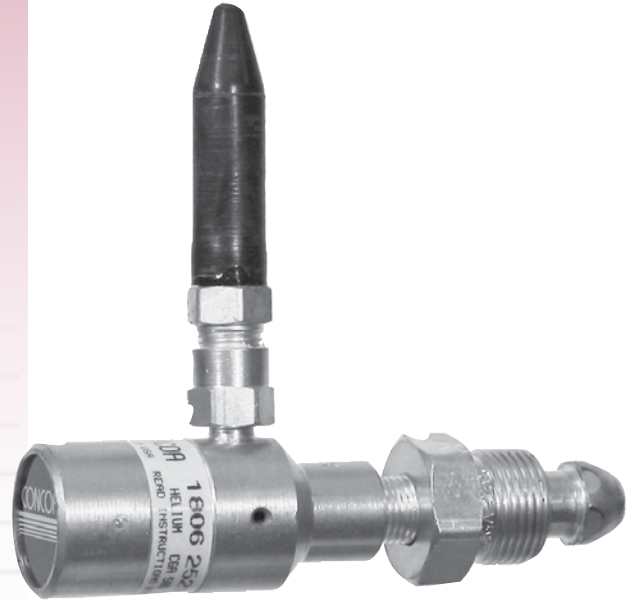

806-2521 Shown

Specialized Use

Gas Service	Stock Number	Inlet CGA	Inflator Valve	Over Pressure Relief	Tie Hook Ready	Wrench Connection	Hand TIGHT Connection	Cylinder Pressure Gauge
Helium	806-2521	580	Rubber Tilt	.	.	.		
	806-2522			.	.		.	
	806-2523			.	.	.		.
	806-2524			.	.		.	.