

9600 Series Single Stage Regulator



Heavy Duty Heating and Cutting

Features


- 2.5" (63mm) Convuluted Neoprene® Diaphragm
 - *Steady pressure control*
- Large Seat Displacement
 - *High flow capacity*
- 2.5" PSI/kPa Pressure Gauges
 - *Excellent visibility*

Material

- Heavy Forged Brass Body
- PTFE Seat
- Glass Wool Inlet Filter

Specification

- 3000 psi Max Inlet
- Temperature Range -40° to 140°F (-40° to 60°C)

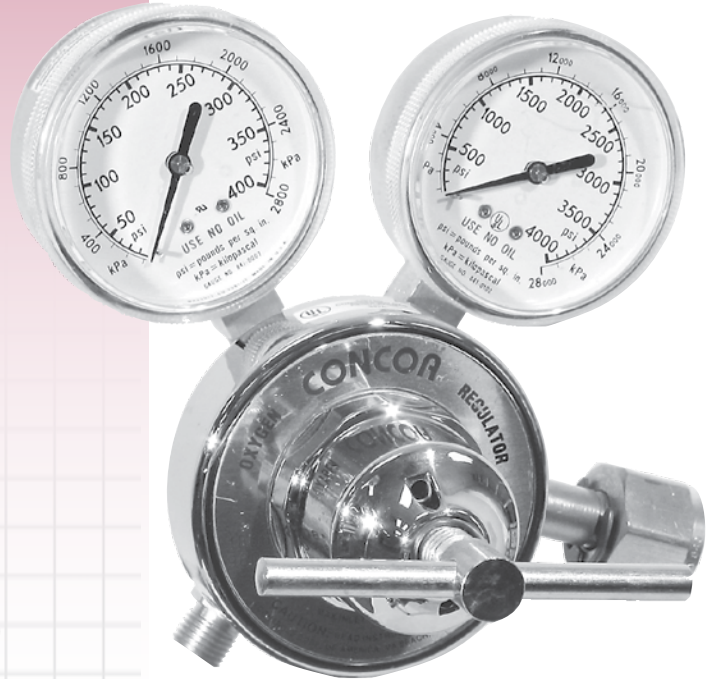

806-9600 Shown

Gas Service	Stock Number	Inlet CGA	Delivery Range PSIG	Outlet Fittings	Pressure Gauges
Oxygen	806-9600	540	0-180 PSIG	9/16-18 "B" RH Ext.	400 & 4000 PSIG
	806-9606	540	0-120 PSIG	9/16-18 "B" RH Ext.	200 & 4000 PSIG
Acetylene, Fuel Gases	806-9602	300	0-15* PSIG	9/16-18 "B" LH Ext.	30 Redline & 400 PSIG
	806-9609	510	0-15* PSIG	9/16-18 "B" LH Ext.	30 Redline & 400 PSIG
MAPP, Propylene, Propane (Not for Acetylene)	806-9632	510	0-40 PSIG	9/16-18 "B" LH Ext.	60 & 400 PSIG
Argon, Nitrogen, Helium	806-9605	580	0-180 PSIG	5/8-18 "B" RH Int.	400 & 4000 PSIG
Argon, Helium, W.P. Nitrogen	806-9621	580	0-40 PSIG	5/8-18 "B" RH Int.	60 & 4000 PSIG
Nitrogen O.P.	806-9622	555	0-180 PSIG	5/8-18 "B" RH Int.	400 & 4000 PSIG
CO2	806-9675	320	0-40 PSIG	5/8-18 "B" RH Int.	60 & 4000 PSIG

* Acetylene should not be used over 15 PSIG