

Advantium 2 Remote Alarm

Features

- High profile visual and audible notification
- Local audible alarm silence function
- Three channels
Two input and one output
- Dry contact relay output
One general
- NO or NC switch compatibility
- Auto-reset when cylinders are replenished



Specifications

- **Audio**
80 db audible alarm
- **Power**
115 VAC or 220 VAC
- **Relay Contact Rating**
1A@24 VDC or .5A@115 VAC
- **Dimensions**
3 1/4"W x 6"L x 2"D
- **Fuses**
120 VAC, .5A normal blow, type 3AG
220 VAC, .25A normal blow, type 3AG
- **Connections**
Input connector D6
Relay output connector D4


Ordering Information

Part Number	Description
529-5106-120	Single-system remote alarm (110V)
529-5106-220	Single-system remote alarm (220V)
529-5312	Intrinsic Safety Barriers for 529-5106 alarm
529-5316-3	3' cable assembly 6 pin female x 6 pin female
529-5316-10	10' cable assembly 6 pin female x 6 pin female
529-5316-25	25' cable assembly 6 pin female x 6 pin female

Advantium Monitoring Software

Features

- Real time systems monitoring
- Email or fax notification
- 24/7 data log
- RS-232 format
- Program flexibility

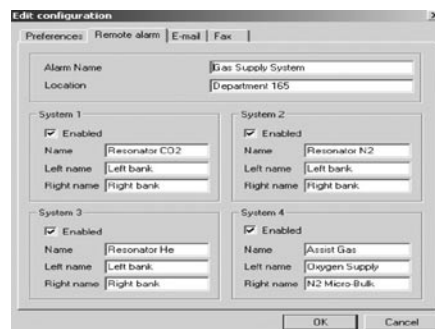

Specifications

- **Compatibility**
Windows 98, ME, NT, 2000, or XP
- **Interface**
RS-232 serial port
- **Email Function Requires Modem with Dial-up Connection or Network Card**

Ordering Information

Part Number	Description
529-5390	Advantium 8 RS232 Monitoring Software